

Technical Specifications






Geoflex Two Stage Dehumidification System

Model 064 - 410A - Top Discharge

Available Options
Straight Thru Air Discharge, Bottom Discharge
Pumps can be Built-in, pre-wired, pre-fused & pre-controlled
Partial Hot Water(s) c/w Internal Pump & High Limit Switch
Demand Hot Water(s) c/w Internal Pump, if required
10, 15, 20K Back-up/emergency heater available
Web Based Monitoring System
Flexible Orientation, air discharge, water connections
Diagnostic LED Function Light Array
K-Type ThermoProbes for simpler in field diagnostics
External DX Condensor
100% Internal Water Condensor
Proportional or 100% Water Reheat Systems
Cupronickel and Double Wall Vented Coils for specialized apps.

Elements	
Description	Type
Refrigerant	R410A
Base Unit Refrigerant Charge	10° F Superheat on Base Unit
Compressor	Scroll
Blower	Direct Drive
Air Coil Coating	Baked Acrylic Process
Condensate Pan	SuperGard Coated
Internal Air Reheat Condensor	DX
Optional Pool Reheat Condensor	Co-axial
Optional Water Condensor	Co-Axial
Base Unit Weight	
Base Unit Shipping Weight	

Standard Two Stage Features	
Highest Efficiency	Two Stage systems automatically adjust capacity based on occupied and unoccupied loads, offering highest operating efficiency
Internal Piping	All Internal Refrigeration Piping is Insulated to Reduce Noise and Potential Pipe Degradation
Air Coils	Air Coils and internal components are coated and baked with an Acrylic Coating
Low Noise Package	1" acoustical insulation & all internal refrigeration lines are fully insulated to reduce noise potential.
Electronic Diagnostics	On board fault Diagnostics
Cabinet	A Separator Plate is used between the Air and Refrigeration Section
Service & Maintenance	Service Doors Surround System
Refrigeration Section	An Internal Negative Pressure Port is incorporated to Reduce Heat or Condensation Build-up.
Service Switches	Independent, Low & High Pressure & Low Flow c/w HP & LP Memory
Freon Service	Bi-flow Filter/Drier & Moisture Indicating Sight Glass
Condensate Sensor	Electronic Condensate Pan Overflow Sensor is included in all Dehumidification Systems.
Condensate Line Position	Systems come with a condensation line that can be adapted to any corner of the system, in the field!
Evaporator Construction	All Evaporator Coils are Insulated to avoid Condensation Rusting
Field Adaption	All Systems are designed to offer maximum field adaptability

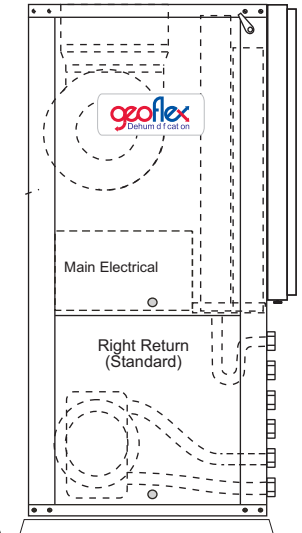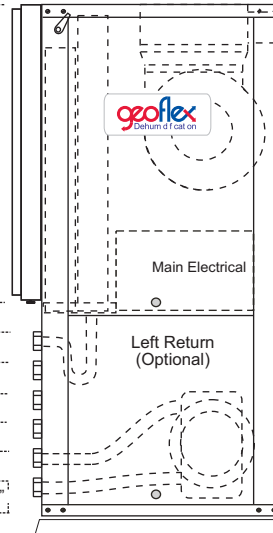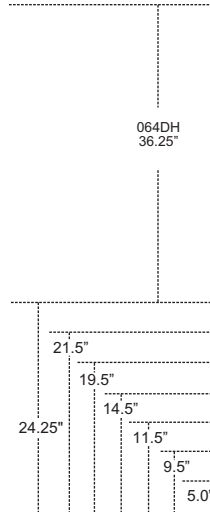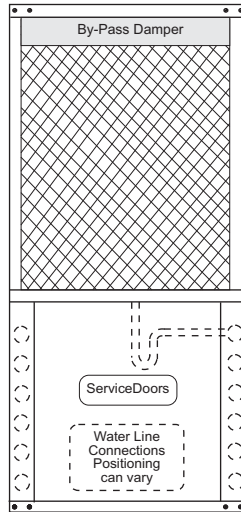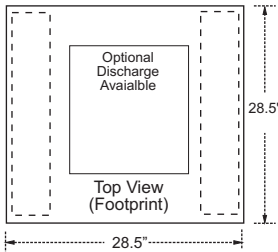

- Geoflex Advanced, Two Step Dehumidification Systems
- Are designed within a modularized format to offer optimal configuration capabilities with consideration to efficiency, functionality, service & field adaption opportunities.
 - Can be ordered in virtually any configuration, vertical, horizontal, top, bottom or straight thru discharge, etc.
 - Can be ordered/ designed to exact project retrofit or new design match with a myriad of options.

Two Step Dehumidification Performance Data														
Model	Fan Motor Type	Spd	Air Temp °F	50% RH			55% RH			60% RH			Flow	
				Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Indoor Air CFM	Damper * Added CFM
064	PSC	Full	80	15.9	34,026	50,880	17.5	32,562	51,588	21.0	32,084	53,415	1,920	2,688
	PSC	Part	80	12.5	27,035	40,020	13.8	25,722	40,453	16.5	25,292	41,841		
	PSC	Full	82	16.6	33,045	49,708	19.9	31,847	50,690	21.7	30,910	51,871		
	PSC	Part	82	13.0	26,156	39,020	15.6	25,079	39,685	17.0	24,235	40,518		
	PSC	Full	84	20.2	32,084	48,559	24.3	31,026	49,659	26.5	29,992	50,664		
	PSC	Part	84	15.8	25,292	38,038	19.0	24,340	38,802	20.7	23,407	39,482		

Single Step, 410A Electrical Data														
Model	Voltage Code	Voltage	Min/Max Voltage	Compressor			Blower Hp	Blower FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR	Supply Wire		
				RLA	LRA	LRA*						Min AWG 60°C	Max Ft (M)	
064	A	208-230/60/1	197/254	28.8	152.9	53.6	1	5.3	34.1	41.0	70	6	125 (38.1)	
	C	208-230/60/3	197/254	16.2	110.0	-	1	4.4	20.6	24.7	40	8	155 (47.3)	
	D	460/60/3	414/506	7.6	52.0	-	1	2.0	9.6	11.6	20	12	260 (79.3)	
	E	575/60/3	518/633	7.6	52.0	-	1	1.6	9.2	11.1	20	12	344 (104.9)	

Notes: LRA* estimated with optional "Secure Start" installed (208-230/60/1)
 HACR circuit breaker in USA only All fuses Class RK-5
 In some caeses local & national electrical codes will superceed fuse & wire size information as supplied herein, which must take precedent.

Wire length based on higher if 2 voltages, one way 2.0% voltage drop
 Wire size based on 60°C copper conductor & minimum circuit ampacity



Geoflex Systems are CSA approved
 GF-DH-TS-TD-064-R410A-11-07-11
 all rights reserved ©2006 geoflex systems inc.
 Due to ongoing research and development Geoflex reserves the right to change or alter specifications and configurations without notice!

Plant Office:
 517 McCormick Blvd., London, Ontario N5W 4C8
 Phone: 519.488.1653 Fax: 519.913.1259
 Email: plant@geoflexsystems.com

Administration Office:
 #1, 301 Pakwa Pl., Saskatoon, Sk, S7L 6A3
 Phone: 306.668.0090 Fax: 306.668.0049
 Email: admin@geoflexsystems.com

www.geoflexsystems.com

Technical Specifications






Geoflex Two Stage Dehumidification System

Model 064 - 410A - Bottom Discharge

Available Options
Straight Thru Air Discharge, Bottom Discharge
Pumps can be Built-in, pre-wired, pre-fused & pre-controlled
Partial Hot Water(s) c/w Internal Pump & High Limit Switch
Demand Hot Water(s) c/w Internal Pump, if required
10, 15, 20K Back-up/emergency heater available
Web Based Monitoring System
Flexible Orientation, air discharge, water connections
Diagnostic LED Function Light Array
K-Type ThermoProbes for simpler in field diagnostics
External DX Condensor
100% Internal Water Condensor
Proportional or 100% Water Reheat Systems
Cupronickel and Double Wall Vented Coils for specialized apps.

Elements	
Description	Type
Refrigerant	R410A
Base Unit Refrigerant Charge	10° F Superheat on Base Unit
Compressor	Scroll
Blower	Direct Drive
Air Coil Coating	Baked Acrylic Process
Condensate Pan	SuperGard Coated
Internal Air Reheat Condensor	DX
Optional Pool Reheat Condensor	Co-axial
Optional Water Condensor	Co-Axial
Base Unit Weight	
Base Unit Shipping Weight	

Standard Two Stage Features	
Highest Efficiency	Two Stage systems automatically adjust capacity based on occupied and unoccupied loads, offering highest operating efficiency
Internal Piping	All Internal Refrigeration Piping is Insulated to Reduce Noise and Potential Pipe Degradation
Air Coils	Air Coils and internal components are coated and baked with an Acrylic Coating
Low Noise Package	1" acoustical insulation & all internal refrigeration lines are fully insulated to reduce noise potential.
Electronic Diagnostics	On board fault Diagnostics
Cabinet	A Separator Plate is used between the Air and Refrigeration Section
Service & Maintenance	Service Doors Surround System
Refrigeration Section	An Internal Negative Pressure Port is incorporated to Reduce Heat or Condensation Build-up.
Service Switches	Independent, Low & High Pressure & Low Flow c/w HP & LP Memory
Freon Service	Bi-flow Filter/Drier & Moisture Indicating Sight Glass
Condensate Sensor	Electronic Condensate Pan Overflow Sensor is included in all Dehumidification Systems.
Condensate Line Position	Systems come with a condensation line that can be adapted to any corner of the system, in the field!
Evaporator Construction	All Evaporator Coils are Insulated to avoid Condensation Rusting
Field Adaption	All Systems are designed to offer maximum field adaptability

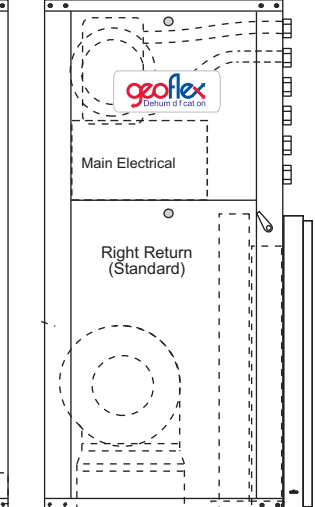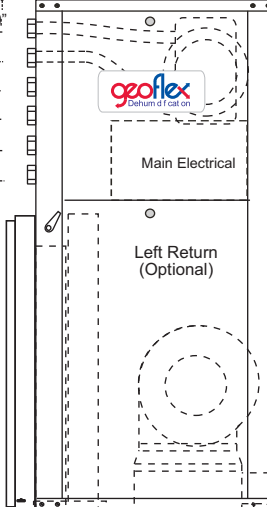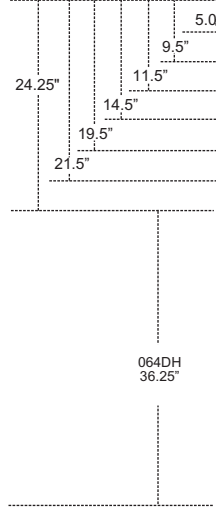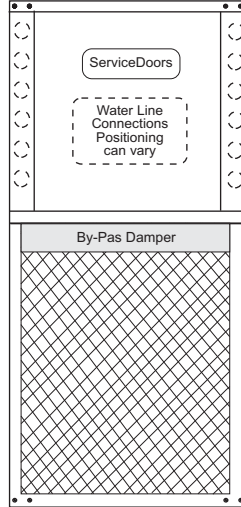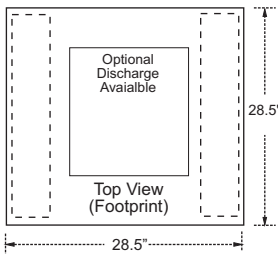

- Geoflex Advanced, Two Step Dehumidification Systems
- Are designed within a modularized format to offer optimal configuration capabilities with consideration to efficiency, functionality, service & field adaption opportunities.
 - Can be ordered in virtually any configuration, vertical, horizontal, top, bottom or straight thru discharge, etc.
 - Can be ordered/ designed to exact project retrofit or new design match with a myriad of options.

Two Step Dehumidification Performance Data														
Model	Fan Motor Type	Spd	Air Temp °F	50% RH			55% RH			60% RH			Flow	
				Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Indoor Air CFM	Damper * Added CFM
064	PSC	Full	80	15.9	34,026	50,880	17.5	32,562	51,588	21.0	32,084	53,415	1,920	2,688
	PSC	Part	80	12.5	27,035	40,020	13.8	25,722	40,453	16.5	25,292	41,841		
	PSC	Full	82	16.6	33,045	49,708	19.9	31,847	50,690	21.7	30,910	51,871		
	PSC	Part	82	13.0	26,156	39,020	15.6	25,079	39,685	17.0	24,235	40,518		
	PSC	Full	84	20.2	32,084	48,559	24.3	31,026	49,659	26.5	29,992	50,664		
	PSC	Part	84	15.8	25,292	38,038	19.0	24,340	38,802	20.7	23,407	39,482		

Single Step, 410A Electrical Data														
Model	Voltage Code	Voltage	Min/Max Voltage	Compressor			Blower Hp	Blower FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR	Supply Wire		
				RLA	LRA	LRA*						Min AWG 60°C	Max Ft (M)	
064	A	208-230/60/1	197/254	28.8	152.9	53.6	1	5.3	34.1	41.0	70	6	125	(38.1)
	C	208-230/60/3	197/254	16.2	110.0	-	1	4.4	20.6	24.7	40	8	155	(47.3)
	D	460/60/3	414/506	7.6	52.0	-	1	2.0	9.6	11.6	20	12	260	(79.3)
	E	575/60/3	518/633	7.6	52.0	-	1	1.6	9.2	11.1	20	12	344	(104.9)

Notes: LRA* estimated with optional "Secure Start" installed (208-230/60/1)
 HACR circuit breaker in USA only All fuses Class RK-5
 In some caeses local & national electrical codes will superceed fuse & wire size information as supplied herein, which must take precedent.
 Wire length based on higher if 2 voltages, one way 2.0% voltage drop
 Wire size based on 60°C copper conductor & minimum circuit ampacity



Geoflex Systems are CSA approved
 GF-DH-TS-BD-064-R410A-11-07-11
 all rights reserved ©2006 geoflex systems inc.
 Due to ongoing research and development Geoflex reserves the right to change or alter specifications and configurations without notice!

Plant Office:
 517 McCormick Blvd., London, Ontario N5W 4C8
 Phone: 519.488.1653 Fax: 519.913.1259
 Email: plant@geoflexsystems.com

Administration Office:
 #1, 301 Pakwa Pl., Saskatoon, Sk, S7L 6A3
 Phone: 306.668.0090 Fax: 306.668.0049
 Email: admin@geoflexsystems.com

www.geoflexsystems.com

Technical Specifications

Geoflex Two Stage Dehumidification System

Model 064 - 410A - Horizontal

Available Options
Straight Thru Air Discharge, Bottom Discharge
Pumps can be Built-in, pre-wired, pre-fused & pre-controlled
Partial Hot Water(s) c/w Internal Pump & High Limit Switch
Demand Hot Water(s) c/w Internal Pump, if required
10, 15, 20K Back-up/emergency heater available
Web Based Monitoring System
Flexible Orientation, air discharge, water connections
Diagnostic LED Function Light Array
K-Type ThermoProbes for simpler in field diagnostics
External DX Condensor
100% Internal Water Condensor
Proportional or 100% Water Reheat Systems
Cupronickel and Double Wall Vented Coils for specialized apps.

Elements	
Description	Type
Refrigerant	R410A
Base Unit Refrigerant Charge	10° F Superheat on Base Unit
Compressor	Scroll
Blower	Direct Drive
Air Coil Coating	Baked Acrylic Process
Condensate Pan	SuperGard Coated
Internal Air Reheat Condensor	DX
Optional Pool Reheat Condensor	Co-axial
Optional Water Condensor	Co-Axial
Base Unit Weight	
Base Unit Shipping Weight	






Standard Two Stage Features	
Highest Efficiency	Two Stage systems automatically adjust capacity based on occupied and unoccupied loads, offering highest operating efficiency
Internal Piping	All Internal Refrigeration Piping is Insulated to Reduce Noise and Potential Pipe Degradation
Air Coils	Air Coils and internal components are coated and baked with an Acrylic Coating
Low Noise Package	1" acoustical insulation & all internal refrigeration lines are fully insulated to reduce noise potential.
Electronic Diagnostics	On board fault Diagnostics
Cabinet	A Separator Plate is used between the Air and Refrigeration Section
Service & Maintenance	Service Doors Surround System
Refrigeration Section	An Internal Negative Pressure Port is incorporated to Reduce Heat or Condensation Build-up.
Service Switches	Independent, Low & High Pressure & Low Flow c/w HP & LP Memory
Freon Service	Bi-flow Filter/Drier & Moisture Indicating Sight Glass
Condensate Sensor	Electronic Condensate Pan Overflow Sensor is included in all Dehumidification Systems.
Condensate Line Position	Systems come with a condensation line that can be adapted to any corner of the system, in the field!
Evaporator Construction	All Evaporator Coils are Insulated to avoid Condensation Rusting
Field Adaption	All Systems are designed to offer maximum field adaptability

Geoflex Advanced, Two Step Dehumidification Systems

- Are designed within a modularized format to offer optimal configuration capabilities with consideration to efficiency, functionality, service & field adaption opportunities.
- Can be ordered in virtually any configuration, vertical, horizontal, top, bottom or straight thru discharge, etc.
- Can be ordered/designed to exact project retrofit or new design match with a myriad of options.

Notes:

- A 6" Space must be left under the system to allow for a condensate drain trap.
- Much consideration must be given to noise, as horizontal units are commonly hung above drop ceilings in office spaces
- Back-up/Emergency Plenum Heaters can be built in with top and bottom discharge, all other discharge options would be built on.

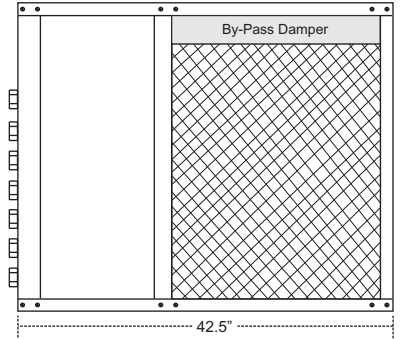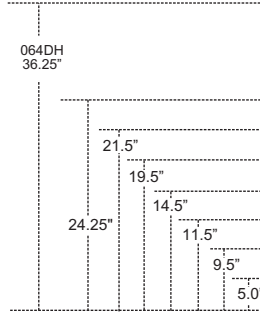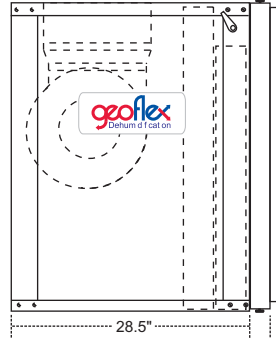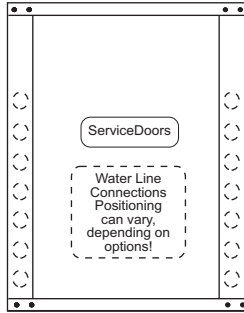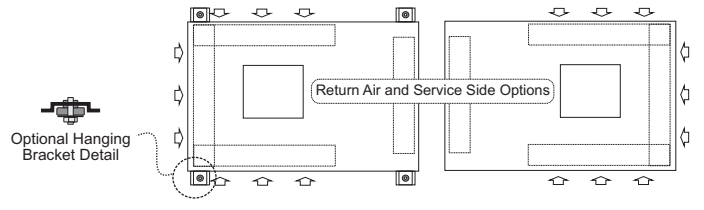

Two Step Dehumidification Performance Data														
Model	Fan Motor Type	Spd	Air Temp °F	50% RH			55% RH			60% RH			Flow	
				Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Mositure Removal lbs/hr	Sensible Cooling Btuh	Total Capacity Btuh	Indoor Air CFM	Damper * Added CFM
064	PSC	Full	80	15.9	34,026	50,880	17.5	32,562	51,588	21.0	32,084	53,415	1,920	2,688
	PSC	Part	80	12.5	27,035	40,020	13.8	25,722	40,453	16.5	25,292	41,841		
	PSC	Full	82	16.6	33,045	49,708	19.9	31,847	50,690	21.7	30,910	51,871		
	PSC	Part	82	13.0	26,156	39,020	15.6	25,079	39,685	17.0	24,235	40,518		
	PSC	Full	84	20.2	32,084	48,559	24.3	31,026	49,659	26.5	29,992	50,664		
	PSC	Part	84	15.8	25,292	38,038	19.0	24,340	38,802	20.7	23,407	39,482		

Single Step, 410A Electrical Data														
Model	Voltage Code	Voltage	Min/Max Voltage	Compressor			Blower Hp	Blower FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR	Supply Wire		
				RLA	LRA	LRA*						Min AWG 60°C	Max Ft (M)	
064	A	208-230/60/1	197/254	28.8	152.9	53.6	1	5.3	34.1	41.0	70	6	125	(38.1)
	C	208-230/60/3	197/254	16.2	110.0	-	1	4.4	20.6	24.7	40	8	155	(47.3)
	D	460/60/3	414/506	7.6	52.0	-	1	2.0	9.6	11.6	20	12	260	(79.3)
	E	575/60/3	518/633	7.6	52.0	-	1	1.6	9.2	11.1	20	12	344	(104.9)

Notes: LRA* estimated with optional "Secure Start" installed (208-230/60/1)
 HACR circuit breaker in USA only All fuses Class RK-5
 In some caeses local & national electrical codes will superceed fuse & wire size information as supplied herein, which must take precedent.



Geoflex Systems are CSA approved

GF-DH-TS-HZ-064-R410A-11-07-11
 all rights reserved ©2006 geoflex systems inc.
 Due to ongoing research and development Geoflex reserves the right to change or alter specifications and configurations without notice!

Plant Office:
 517 McCormick Blvd., London, Ontario N5W 4C8
 Phone: 519.488.1653 Fax: 519.913.1259
 Email: plant@geoflexsystems.com

Administration Office:
 #1, 301 Pakwa Pl., Saskatoon, Sk, S7L 6A3
 Phone: 306.668.0090 Fax: 306.668.0049
 Email: admin@geoflexsystems.com

www.geoflexsystems.com