


# Geoflex Single Compressor, Single or Two Stage Geothermal System Bottom Discharge General Ducting Illustration

Standard Features	All Geoflex Systems	Available Options	Notes:
Low Noise Package	1" acoustical insulation & all internal refrigeration lines are fully insulated to reduce noise potential.	All Pumps can be Built-in, pre-wired and pre-fused	<ul style="list-style-type: none"> <li>• Demand Hot Water Option Product water out must not exceed 125 degrees F. Although the system can heat beyond this level, higher temps will negatively impact the longevity of the equipment.</li> <li>• Water quality is extremely important, especially with and open well or Domestic Hot Water Systems. This is not generally an issue with closed loop systems.</li> <li>• All Geoflex Systems are designed within a modularized criteria to offer optima configuration capabilities with consideration to efficiency, functionality, service and field adaptation opportunities.</li> </ul>
Electronic Diagnostics	On board fault Diagnostics	Partial Hot Water(s) c/w Internal Pump & High Limit Switch	
Service & Maintenance	Service Doors Surround System	Demand Hot Water(s) c/w Internal Pump	
Service Switches	Independent, Low & High Pressure & Low Flow c/w HP & LP Memory	Humidification/Dehumidification Systems	
Freon Service	Bi-flow Filter/Drier & Moisture Indicating Sight Glass	10, 15, 20K/hydronic back-up/emergency available	
Evaporator Construction	All Evaporator Coils are Insulated to avoid Condensation Rusting	Flexible, orientation, air discharge, water connections	
Field Adaption	All Geoflex Systems are designed to offer maximum field adaptability	Passive Cooling, 12 strip diagnostic light system and Built-in ThermoProbes for simpler in field diagnostics	

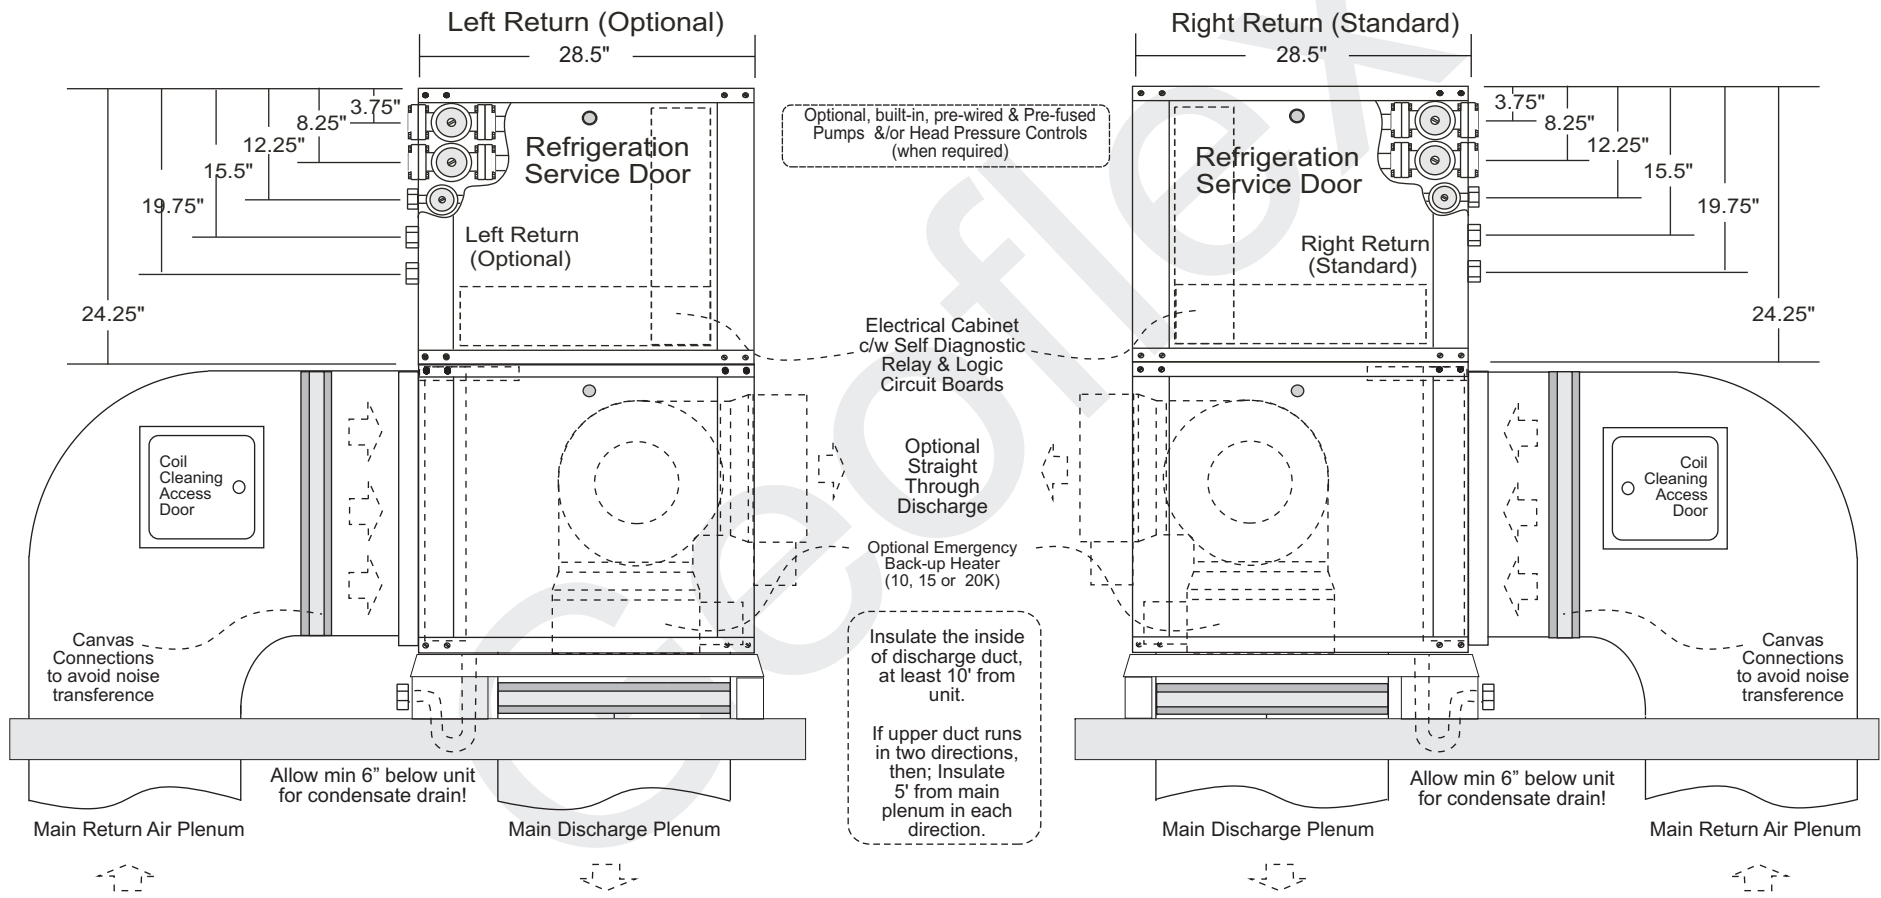

Note: All Geoflex Systems are CSA (Canadian Standards Association) Approved

GF-GD-WA-11-20-06-General Ducting  
 all rights reserved © Geoflex Systems Inc. 2006  
 Due to ongoing research and development Geoflex reserves the right to change or alter specifications and configurations without notice!

**Plant Office:**  
 517 McCormick Blvd., London, Ontario N5W 4C8  
 Phone: 519.488.1653 Fax: 519.913.1259  
 Email: plant@geoflexsystems.com

**Administration Office:**  
 #1, 301 Pakwa Pl., Saskatoon, Sk, S7L 6A3  
 Phone: 306.668.0090 Fax: 306.668.0049  
 Email: admin@geoflexsystems.com

[www.geoflexsystems.com](http://www.geoflexsystems.com)