


Geoflex Single Compressor, Single or Two Stage Dehumidification System Top Discharge General Ducting Illustration

| Standard Features | All Geoflex Systems | Available Options | Notes: |
|-------------------------|--|--|---|
| Low Noise Package | 1" acoustical insulation & all internal refrigeration lines are fully insulated to reduce noise potential. | All Pumps can be Built-in, pre-wired and pre-fused | <ul style="list-style-type: none"> Geoflex Dehumidification Systems can be ordered in virtually any configuration, vertical, horizontal, top, bottom or straight thru discharge, etc. Can be ordered/adjusted to exact match a retrofit. Water quality is extremely important, especially with and open well or Domestic Hot Water Systems. This is not generally an issue with closed loop systems. All Geoflex Systems are designed within a modularized criteria to offer optimum configuration capabilities with consideration to efficiency, functionality, service and field adaptation opportunities. |
| Electronic Diagnostics | On board fault Diagnostics | Partial Hot Water(s) c/w Internal Pump & High Limit Switch | |
| Service & Maintenance | Service Doors Surround System | Demand Hot Water(s) c/w Internal Pump | |
| Service Switches | Independent, Low & High Pressure & Low Flow c/w HP & LP Memory | Humidification/Dehumidification Systems | |
| Freon Service | Bi-flow Filter/Drier & Moisture Indicating Sight Glass | 10, 15, 20K back-up/emergency available | |
| Evaporator Construction | All Evaporator Coils are Insulated to avoid Condensation Rusting | Flexible, orientation, air discharge, water connections | |
| Field Adaption | All Geoflex Systems are designed to offer maximum field adaptability | Passive Cooling, 12 strip diagnostic light system and Built-in ThermoProbes for simpler in field diagnostics | |



Note: All Geoflex Systems are CSA (Canadian Standards Association) Approved

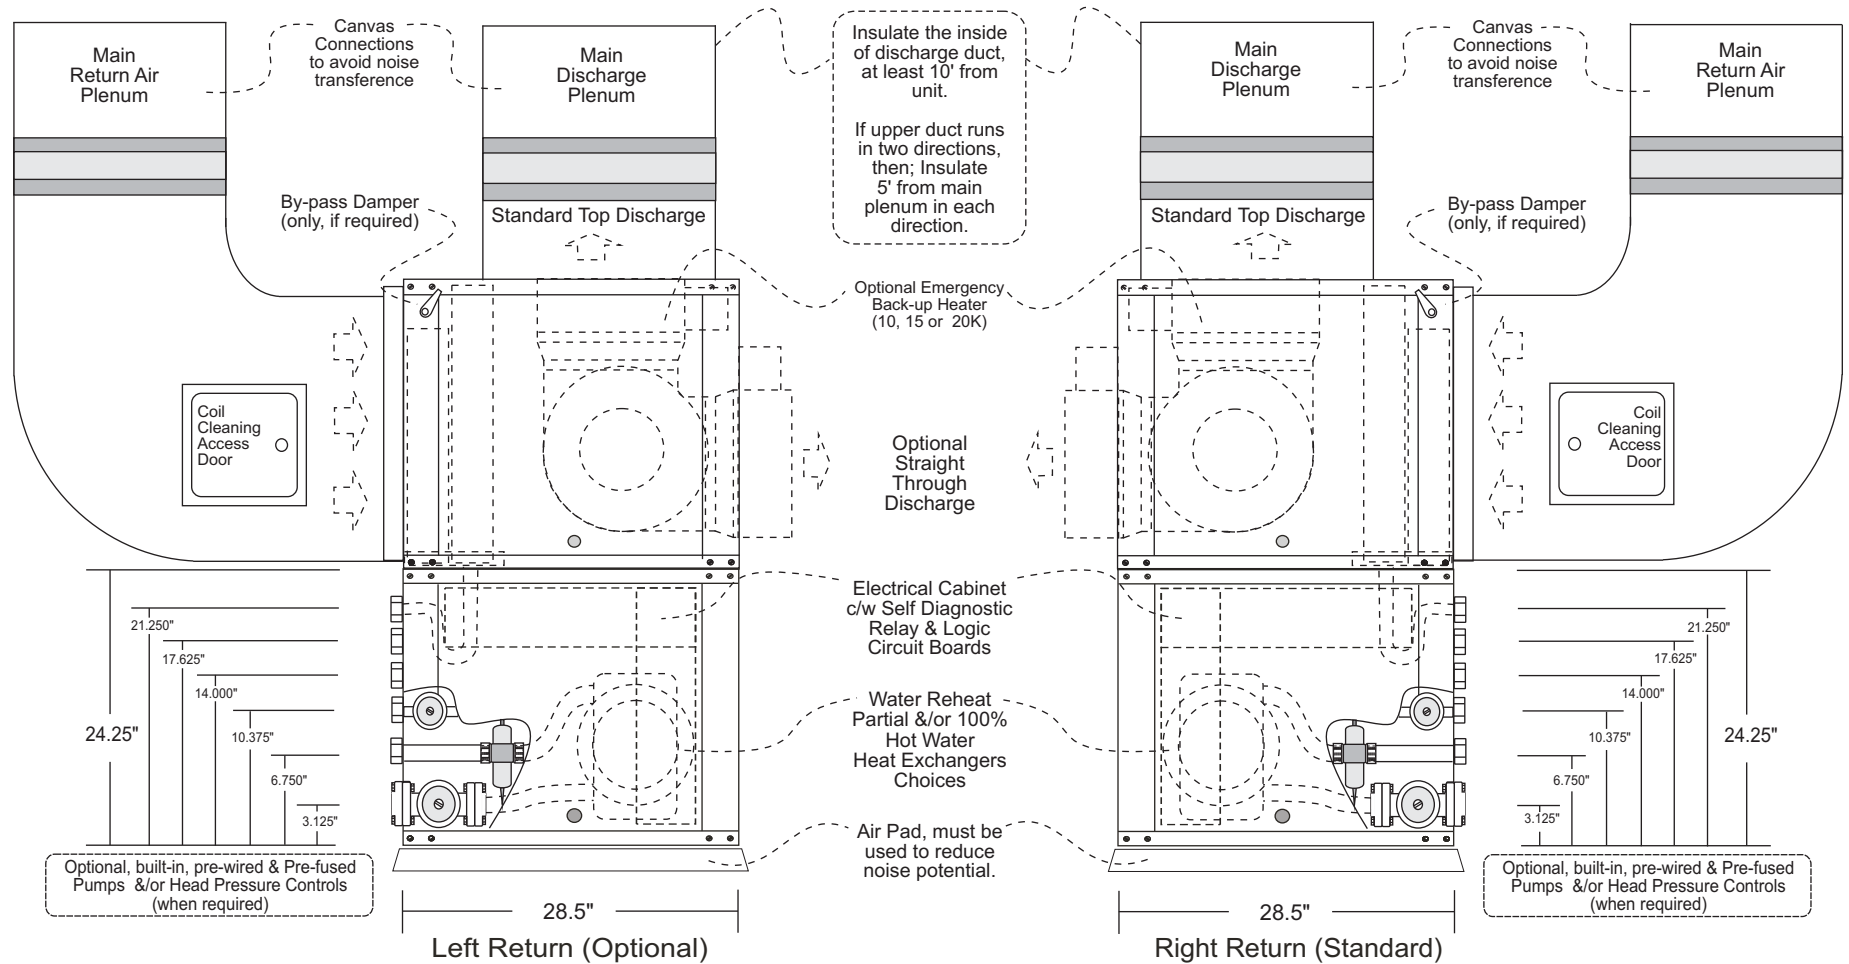

GF-GD-DH-11-20-06-General Ducting
all rights reserved © Geoflex Systems Inc. 2006
Due to ongoing research and development Geoflex reserves the right to change or alter specifications and configurations without notice!

Plant Office:
517 McCormick Blvd., London, Ontario N5W 4C8
Phone: 519.488.1653 Fax: 519.913.1259
Email: plant@geoflexsystems.com

www.geoflexsystems.com

Administration Office:
#1, 301 Pakwa Pl., Saskatoon, Sk, S71 6A3
Phone: 306.668.0090 Fax: 306.668.0049
Email: admin@geoflexsystems.com